



TWIN COIN

สลิ้งประมงตราเหรียญคู่


Fishing Wire Rope



TWIN COIN


สลิ้งประมงตราเหรียญคู่

Fishing Wire Rope

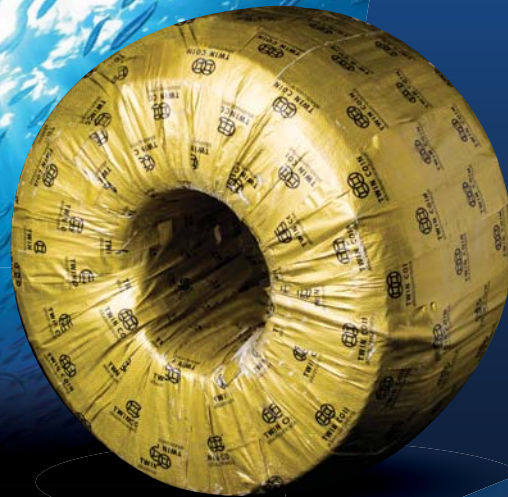

**STRONG
DURABLE**

WhatsApp : (+66)94-275-9999

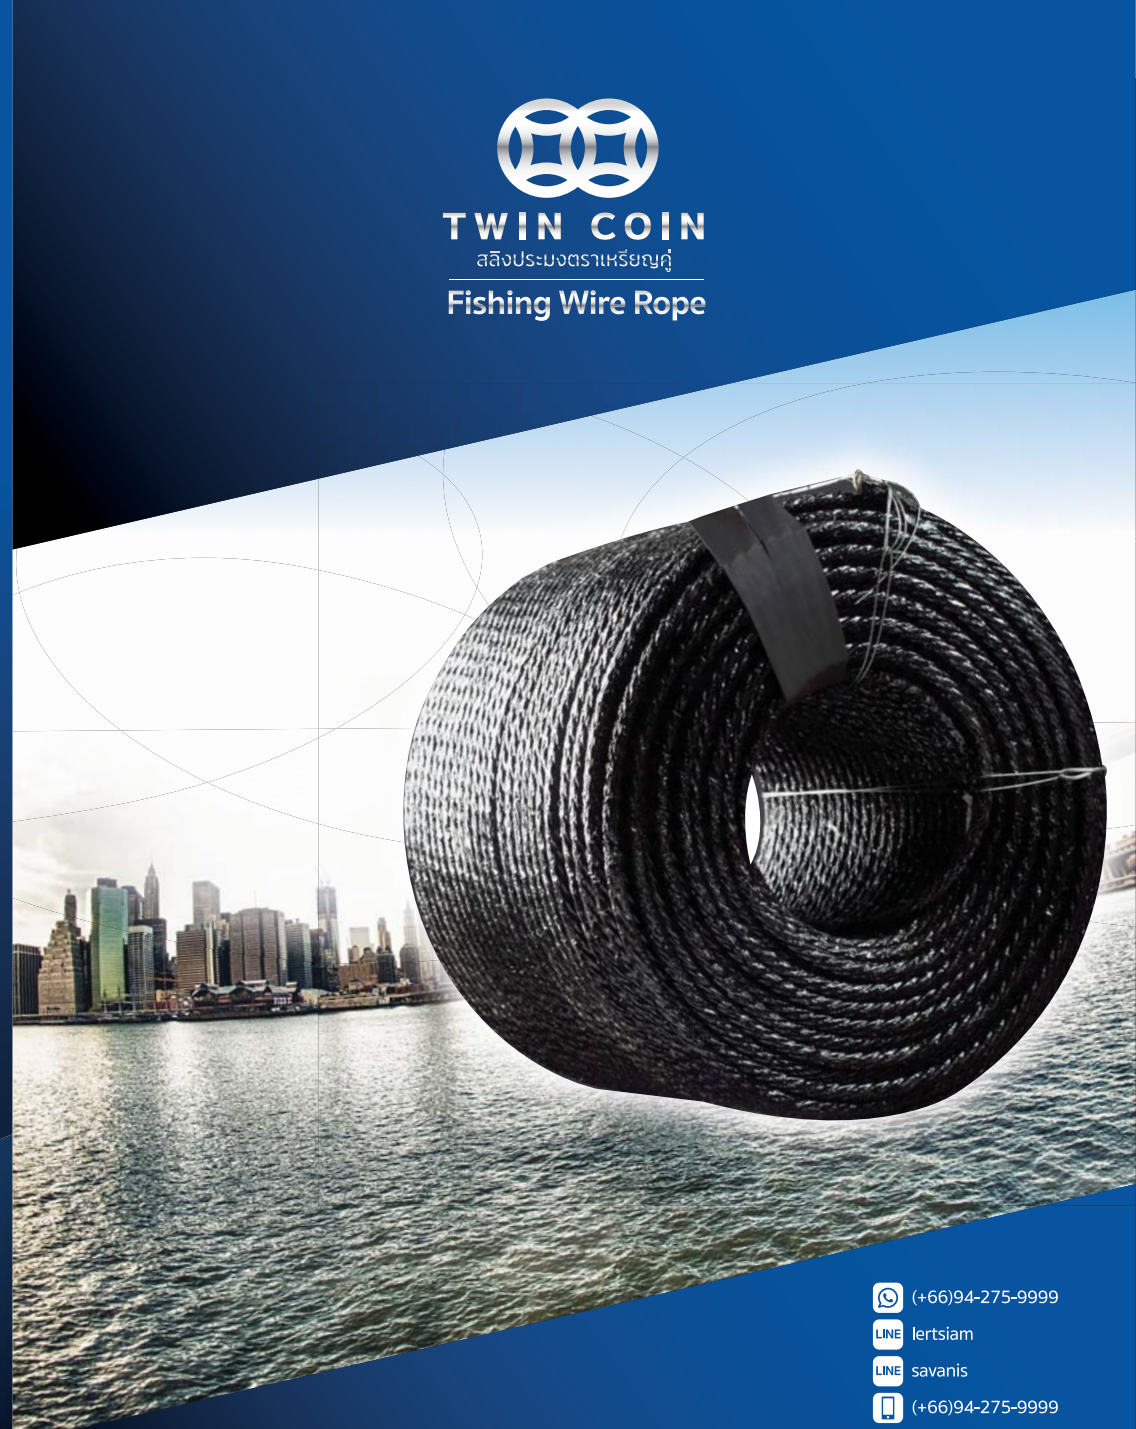

LERT SIAM
Lert Siam Steel Co., Ltd.

-  (+66)94-275-9999
-  lertsiam
-  savanis
-  (+66)94-275-9999
-  (+66)2-294-5999
-  info@lertsiam.co.th
-  www.lertsiam.co.th

LERT SIAM STEEL CO., LTD.

FISHING ROPE 6X19 & 6X7

6X19, PP CORE, RHOL, HOT DIP GALVANIZED,
GRADE 1470 N/MM2, COATING WITH HEAVY GREASE
OR TACKY LUB FOR RUST PROTECTION

Dia. of Wire Rope	Weight per 200 meters	Min. Breaking Load	Application
9 mm	58 kg	40.7 kN (4.15 ton)	Fishing Net Mouth
10 mm	72 kg	50.2 kN (5.12 ton)	
12 mm	102 kg	72.3 kN (7.37 ton)	
14 mm	135 kg	98.4 kN (10.03 ton)	
16 mm	180 kg	128.0 kN (13.05 ton)	
POPULAR 18 mm	239 kg	163.0 kN (16.62 ton)	Trawling Rope
POPULAR 20 mm	290 kg	201.0 kN (20.5 ton)	
22 mm	346 kg	243.0 kN (24.78 ton)	

kN = Kilonewtons

6X7, PP CORE, RHOL, HOT DIP GALVANIZED,
GRADE 1470 N/MM2, COATING WITH HEAVY TACKY LUB
FOR RUST PROTECTION

Dia. of Wire Rope	Weight per 200 meters	Min. Breaking Load	Application
14 mm	141 kg	95.6 kN (9.75 ton)	Trawling Rope
15 mm	166 kg	110.0 kN (11.22 ton)	
16 mm	181 kg	125.0 kN (12.75 ton)	

Packing in bare coil length 200-400 meters/coil or in wooden reel length 1000 meters/coil

6x19 and 6x7 PP Core polypropylene - is one of the most versatile polymers available for wire rope axis

RHOL - Right Hand Ordinary Lay Wire Rope

Hot Dip Galvanized - It is the process of coating iron and steel with zinc, which alloys with the surface of the base metal when immersing the metal in a bath of molten zinc at temperature of around 449 C for long last better quality and corrosion rust

Grade 1470 N/mm2 - heat treatment to furnace process, maximum 1,470 N/mm 2 tensile strength Coating with heavy grease or tacky Lub for rust protection depends on customers preference

